




- Designed for increased PoE+ requirement, 1.15A Current Capability
- Operating Temperature : -40°C to +70°C
- 1500 Vrms Isolation
- Lead-Free


Electrical Parameters @ 25° C

OCL (μ H Min.)	Insertion Loss (dB Max.)	Return Loss (dB Min.)				CMRR (dB Min.)		Crosstalk (dB Min.)
		500K-40 MHz	40-60 MHz	60-80 MHz	80-100 MHz	500K-32 MHz	32-100 MHz	
@ 100 KHz, 0.1 Vrms 35 mA DC bias	500K-100MHz							1-100 MHz
350 (Media Side)	-1.0	-16	-14	-12	-10	-42	-33	-28

Package

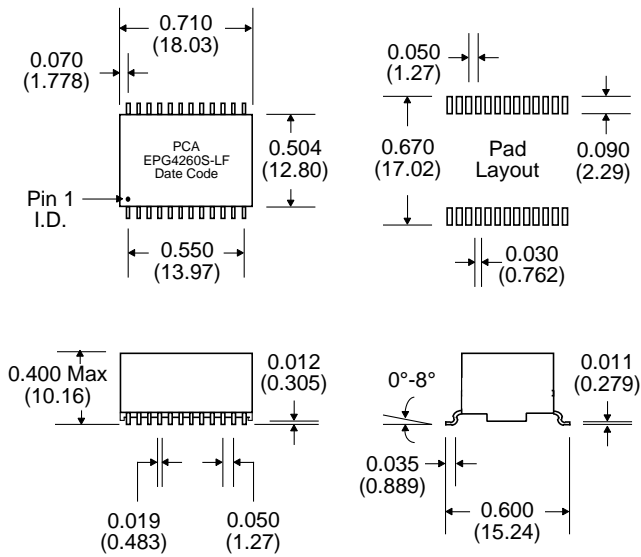

Schematic

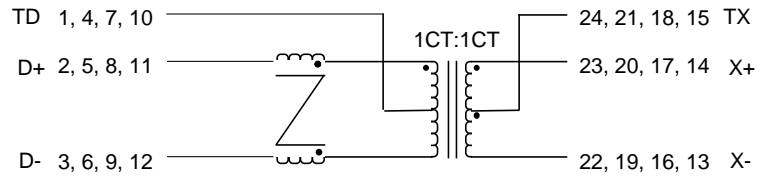

Notes :	EPG4260S-LF
1. Lead Finish	Hot Dipped Sn or SnAG
2. Peak Temperature Rating	245°C
3. Moisture Sensitive Levels	MSL=1
4. Weight	4.28 grams
5. Packaging Information	(Tube) 25 pieces
	(Tape & Reel) 200 pieces/13" reel

Unless Otherwise Specified Dimensions are in Inches /mm \pm .010 / .25