


PCA Part Number	Voltage (V)		Primary OCL (μH Typ.)	Turns Ratio (Pri. to Sec.)	ET (V-μSec.)	Duty Cycle (%)	Rectification (Half or Full Wave)
	V in	V out	@ 100 KHz, 0.1 Vrms	Pri. :Sec.	@ 350 KHz		Connections
EPC3126G-1 {	5	15	793	1CT:2CT	11	75	Voltage Doubler
	3.3	5	793	1CT:2CT	11	75	† Output Center Tap
EPC3126G-2 {	5	5	793	1CT:1.3CT	11	75	† Output Center Tap
	5	10	793	1CT:1.3CT	11	75	Voltage Doubler
EPC3126G-3	5	10	793	1CT:2.6CT	11	77	† Output Center Tap
EPC3126G-4 {	5	12	793	1CT:3CT	11	80	† Output Center Tap
	5	24	793	1CT:3CT	11	80	Voltage Doubler
EPC3126G-5	3.3	5	793	1CT:1CT	11	75	Voltage Doubler
EPC3126G-6	5	5	793	1CT:0.6CT	11	83	Voltage Doubler
EPC3126G-7	5	12	793	1CT:1.5CT	11	80	Voltage Doubler

Pri. Sec.

5 — 6
3 — 4
1 — 2

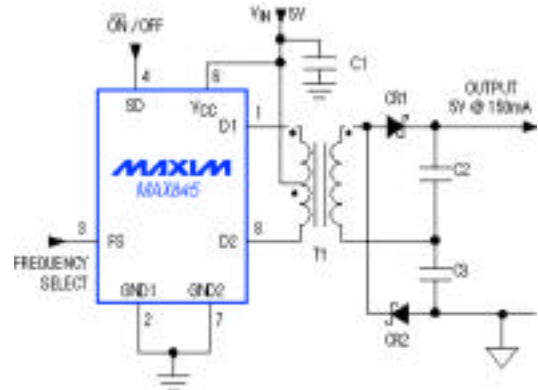

TEL: (818) 892-0761
FAX: (818) 894-5791
<http://www.pca.com>